US008795040B2

(12) **United States Patent**
**Burdett et al.**

(10) **Patent No.: US 8,795,040 B2**
(45) **Date of Patent: Aug. 5, 2014**

(54) **AUTONOMOUS VENTILATION SYSTEM**

(75) Inventors: **Michael P. Burdett**, Tucson, AZ (US); **Daniel Reich**, Tucson, AZ (US)

(73) Assignee: **Oy Halton Group Ltd.**, Helsinki (FI)

( * ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 163 days.

(21) Appl. No.: **13/187,762**

(22) Filed: **Jul. 21, 2011**

(65) **Prior Publication Data**

US 2011/0275301 A1 Nov. 10, 2011

**Related U.S. Application Data**

(63) Continuation of application No. 11/947,924, filed on Nov. 30, 2007, now abandoned.

(60) Provisional application No. 60/968,395, filed on Aug. 28, 2007.

(51) **Int. Cl.**

| | |
|---|---|
| ***B08B 15/02*** | (2006.01) |
| ***F24C 15/20*** | (2006.01) |
| ***G01J 5/48*** | (2006.01) |

(52) **U.S. Cl.**

USPC ..... **454/61**; 454/56; 454/58; 454/67; 250/334

(58) **Field of Classification Search**

USPC ..... 454/61, 56, 58, 67; 250/330, 332, 334, 250/338.1, 342

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

| | | | |
|---|---|---|---|
| 2,743,529 | A | 5/1956 | Hayes |
| 2,833,615 | A | 5/1958 | Kollgaard |
| 2,853,367 | A | 9/1958 | Karol |
| 2,862,095 | A | 11/1958 | Scofield |
| 2,933,080 | A | 4/1960 | Adey |
| 3,045,705 | A | 7/1962 | Hausammann |

(Continued)

FOREIGN PATENT DOCUMENTS

| | | |
|---|---|---|
| AU | 1138776 | 9/1977 |
| AU | 3400697 | 1/1998 |

(Continued)

OTHER PUBLICATIONS

International Search Report and Written Opinion dated Jan. 5, 2007, for International Application No. PCT/US05/26378 filed Jul. 25, 2005.

(Continued)

*Primary Examiner* — Steven B McAllister
*Assistant Examiner* — Frances H Kamps
(74) *Attorney, Agent, or Firm* — Miles & Stockbridge P.C.

(57) **ABSTRACT**

An autonomous ventilation system includes a variable-speed exhaust fan, a controller, an exhaust hood, and an infrared radiation ("IR") sensor. The exhaust fan removes air contaminants from an area. The controller is coupled to the exhaust fan and adjusts the speed of the exhaust fan. The exhaust hood is coupled to the exhaust fan and directs air contaminants to the exhaust fan. The IR sensor is coupled to the controller, detects changes in IR index in a zone below the exhaust hood, and communicates information relating to detected changes in IR index to the controller. The controller adjusts the speed of the exhaust fan in response to information relating to detected changes in IR index. The autonomous ventilation system also includes an alignment laser to indicate a point at which the IR sensor is aimed and a field-of-view ("FOV") indicator to illuminate the zone in which the IR sensor detects changes in IR index.

**10 Claims, 8 Drawing Sheets**






(56) **References Cited**

U.S. PATENT DOCUMENTS

3,323,439 A 6/1967 Waever et al.
3,332,676 A 7/1967 Namy
3,381,134 A 4/1968 Wolf
3,400,649 A 9/1968 Jensen
3,457,850 A 7/1969 Sweet et al.
3,513,766 A 5/1970 Alhrich
3,536,457 A 10/1970 Henderson
3,612,106 A 10/1971 Camboulives et al.
3,690,245 A 9/1972 Ferlise et al.
3,752,056 A 8/1973 Chamberlin et al.
3,809,480 A 5/1974 Somerville et al.
3,825,346 A 7/1974 Rizzo
3,829,285 A 8/1974 Beck
3,866,055 A 2/1975 Pike
3,895,569 A 7/1975 Miller
3,943,836 A 3/1976 Kuechler
3,952,640 A 4/1976 Kuechler
3,978,777 A 9/1976 Nett
4,043,319 A 8/1977 Jensen
4,047,519 A 9/1977 Nett
4,050,368 A 9/1977 Eakes
4,056,877 A 11/1977 Kuechler
4,085,736 A 4/1978 Kuechler
4,105,015 A 8/1978 Isom
4,109,641 A 8/1978 Hunzicker
4,113,439 A 9/1978 Ookubo
4,117,833 A 10/1978 Mueller
4,127,106 A 11/1978 Jensen
4,134,394 A 1/1979 Otenbaker
4,138,220 A 2/1979 Davies
4,146,017 A 3/1979 Overton
4,147,502 A 4/1979 Milton
4,153,044 A 5/1979 Nett
4,155,348 A 5/1979 Ahlrich
4,160,407 A 7/1979 Duym
4,211,154 A 7/1980 Eakes
4,213,947 A 7/1980 Fremont
4,285,390 A 8/1981 Fortune et al.
4,286,572 A 9/1981 Searcy
4,287,405 A 9/1981 Ohmae et al.
4,346,692 A 8/1982 Mccauley
4,350,166 A * 9/1982 Mobarry ..... 600/473
4,373,507 A 2/1983 Schwartz
4,398,415 A 8/1983 Jacocks et al.
4,467,782 A 8/1984 Russel
4,475,534 A 10/1984 Moriarty
4,483,316 A 11/1984 Fritz
4,484,563 A 11/1984 Fritz et al.
4,497,242 A * 2/1985 Moyer ..... 454/61
4,556,046 A 12/1985 Riffel
4,584,929 A 4/1986 Jarmyr et al.
4,586,486 A 5/1986 Kaufman
4,617,909 A 10/1986 Molitor
4,655,194 A 4/1987 Wooden
4,706,553 A 11/1987 Sharp et al.
4,773,311 A 9/1988 Sharp
4,781,460 A 11/1988 Bott
4,788,905 A 12/1988 Von Kohorn
4,793,715 A * 12/1988 Kasner et al. ..... 374/6
4,811,724 A 3/1989 Aalto
4,823,015 A * 4/1989 Galvin et al. ..... 250/564
4,831,747 A * 5/1989 Roos et al. ..... 34/565
4,856,419 A 8/1989 Imai
4,872,892 A 10/1989 Vartiainen et al.
4,903,685 A 2/1990 Melink
4,903,894 A 2/1990 Pellinen et al.
4,921,509 A 5/1990 Maclin
4,934,256 A 6/1990 Moss et al.
4,944,283 A 7/1990 Tsuchiya
4,944,285 A 7/1990 Glassman
5,033,508 A * 7/1991 Laverty, Jr. ..... 137/624.11
5,042,453 A 8/1991 Shellenberger
5,042,456 A 8/1991 Cote
5,050,581 A 9/1991 Roehl-Hager
5,063,834 A 11/1991 Aalto
5,090,303 A 2/1992 Ahmed
5,092,227 A 3/1992 Ahmed et al.
5,115,728 A 5/1992 Ahmed et al.
5,139,009 A 8/1992 Walsh
5,146,284 A 9/1992 Tabarelli et al.
5,205,783 A 4/1993 Dieckert et al.
5,215,075 A 6/1993 Caridis
5,215,497 A 6/1993 Drees
5,220,910 A 6/1993 Aalto
5,240,455 A 8/1993 Sharp
5,251,608 A 10/1993 Cote
5,268,739 A 12/1993 Martinelli et al.
5,311,930 A 5/1994 Bruenn
5,312,296 A 5/1994 Aalto
5,312,297 A 5/1994 Dieckert et al.
5,394,861 A 3/1995 Stegmaier
5,406,073 A * 4/1995 Sharp et al. ..... 250/221
5,414,509 A 5/1995 Veligdan
5,415,583 A 5/1995 Brandt, Jr.
5,518,446 A 5/1996 Jacob
5,522,377 A 6/1996 Fritz
5,558,821 A 9/1996 Konig
5,580,535 A 12/1996 Hoke
5,597,354 A 1/1997 Janu et al.
5,622,100 A 4/1997 King
5,657,744 A 8/1997 Vianen
5,713,346 A 2/1998 Kuechler
5,716,268 A 2/1998 Strongin
5,718,219 A 2/1998 Boudreault
5,720,274 A 2/1998 Brunner et al.
5,764,579 A 6/1998 McMasters et al.
5,779,538 A 7/1998 Jardinier
5,874,292 A 2/1999 McMinn, Jr.
5,882,254 A * 3/1999 Jacob ..... 454/61
5,960,786 A 10/1999 Lambertson
5,992,152 A 11/1999 Weres et al.
6,044,838 A 4/2000 Deng
6,058,929 A 5/2000 Fritz
6,089,970 A 7/2000 Feustel
6,154,686 A * 11/2000 Hefferen et al. ..... 700/276
6,170,480 B1 * 1/2001 Melink et al. ..... 126/299 R
6,171,480 B1 1/2001 Lee et al.
6,173,710 B1 1/2001 Gibson et al.
6,179,763 B1 1/2001 Phillips, III
6,252,689 B1 6/2001 Sharp
6,336,451 B1 1/2002 Rohl-Hager et al.
6,347,626 B1 2/2002 Yi
6,351,999 B1 3/2002 Maul et al.
6,428,408 B1 8/2002 Bell et al.
6,450,879 B1 9/2002 Suen
6,515,283 B1 * 2/2003 Castleman et al. ..... 250/339.15
6,531,966 B2 * 3/2003 Krieger ..... 340/932.2
6,549,554 B2 4/2003 Shiojima et al.
6,645,066 B2 11/2003 Gutta et al.
6,669,547 B2 12/2003 Liu
6,752,144 B1 6/2004 Lee
6,782,294 B2 8/2004 Reich et al.
6,846,236 B2 1/2005 Gregoricka
6,851,421 B2 2/2005 Livchak et al.
6,869,468 B2 3/2005 Gibson
6,878,195 B2 4/2005 Gibson
6,890,252 B2 5/2005 Liu
6,899,095 B2 5/2005 Livchak
6,916,239 B2 7/2005 Siddaramanna et al.
6,920,874 B1 7/2005 Siegel
6,974,380 B2 12/2005 Cui et al.
7,048,199 B2 5/2006 Melink
7,147,168 B1 12/2006 Bagwell et al.
7,258,280 B2 8/2007 Wolfson
7,318,771 B2 1/2008 Huang
7,364,094 B2 4/2008 Bagwell et al.
7,442,119 B2 10/2008 Fluhrer
7,699,051 B2 * 4/2010 Gagas et al. ..... 126/299 D
7,866,312 B2 * 1/2011 Erdmann ..... 126/299 D
2003/0104778 A1 6/2003 Liu
2003/0146082 A1 8/2003 Gibson et al.
2003/0207662 A1 11/2003 Liu
2003/0210340 A1 * 11/2003 Romanowich ..... 348/272
2004/0011349 A1 1/2004 Livchak et al.

(56) **References Cited**

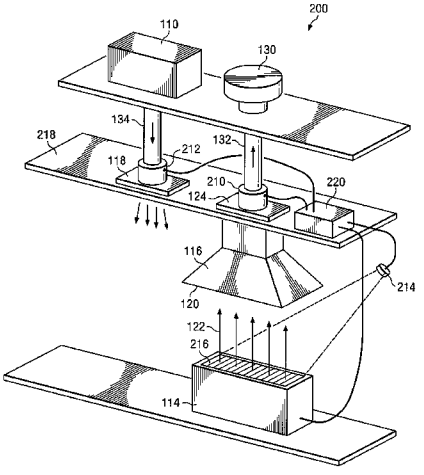U.S. PATENT DOCUMENTS
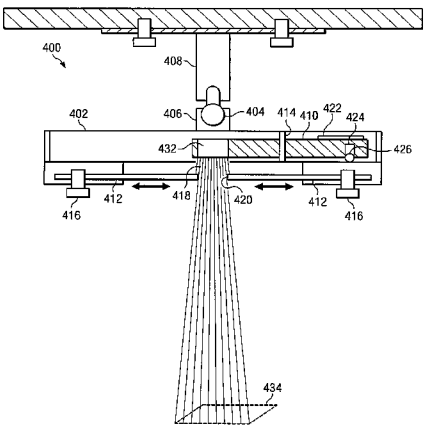
| | | | | |
|---|---|---|---|---|
| 2005/0007578 | A1* | 1/2005 | Ziemins et al. | 356/153 |
| 2005/0098640 | A1* | 5/2005 | Ichishi et al. | 236/49.3 |
| 2005/0115557 | A1 | 6/2005 | Meredith | |
| 2005/0229922 | A1 | 10/2005 | Magner et al. | |
| 2005/0279845 | A1 | 12/2005 | Bagwell et al. | |
| 2006/0009147 | A1 | 1/2006 | Huang et al. | |
| 2006/0032492 | A1 | 2/2006 | Bagwell et al. | |
| 2006/0060187 | A1 | 3/2006 | Luddy et al. | |
| 2006/0219235 | A1 | 10/2006 | Bagwell et al. | |
| 2006/0278216 | A1* | 12/2006 | Gagas et al. | 126/299 D |
| 2007/0001111 | A1* | 1/2007 | Rueb et al. | 250/236 |
| 2007/0015449 | A1 | 1/2007 | Livchak et al. | |
| 2007/0023349 | A1 | 2/2007 | Kyllonen et al. | |
| 2007/0068509 | A1 | 3/2007 | Bagwell et al. | |
| 2007/0165353 | A1 | 7/2007 | Fleischer | |
| 2007/0183154 | A1 | 8/2007 | Robson | |
| 2007/0184771 | A1 | 8/2007 | Fluhrer | |
| 2007/0202791 | A1 | 8/2007 | Lee | |
| 2007/0229293 | A1* | 10/2007 | Martino | 340/630 |
| 2007/0272230 | A9 | 11/2007 | Meredith et al. | |
| 2008/0045132 | A1 | 2/2008 | Livchak et al. | |
| 2008/0138750 | A1* | 6/2008 | Kim | 431/12 |
| 2008/0141996 | A1 | 6/2008 | Erdmann | |
| 2008/0207109 | A1 | 8/2008 | Bagwell | |
| 2008/0258063 | A1* | 10/2008 | Rapanotti | 250/334 |
| 2008/0297808 | A1* | 12/2008 | Riza et al. | 356/503 |
| 2008/0302247 | A1 | 12/2008 | Magner | |
| 2008/0308088 | A1 | 12/2008 | Livchak | |
| 2009/0032011 | A1* | 2/2009 | Livchak et al. | 126/299 D |
| 2009/0093210 | A1 | 4/2009 | Livchak | |
| 2009/0199844 | A1 | 8/2009 | Meredith | |
| 2011/0269386 | A1 | 11/2011 | Burdett et al. | |

FOREIGN PATENT DOCUMENTS

| | | |
|---|---|---|
| AU | 2933601 | 7/2001 |
| BE | 838829 | 6/1976 |
| CA | 1054430 | 5/1979 |
| CA | 1069749 | 1/1980 |
| CA | 1081030 | 7/1980 |
| CA | 2536332 | 3/2005 |
| CH | 682512 | 9/1993 |
| DE | 314477 | 9/1919 |
| DE | 2607301 | 9/1976 |
| DE | 2659736 | 7/1977 |
| DE | 3519189 | 12/1986 |
| DE | 4120175 | 2/1992 |
| DE | 4114329 | 11/1992 |
| DE | 4203916 | 4/1993 |
| DE | 19613513 | 10/1997 |
| EP | 0314085 | 5/1989 |
| EP | 0401583 | 12/1990 |
| EP | 0541862 | 5/1993 |
| EP | 0541863 | 5/1993 |
| EP | 0623398 | 11/1994 |
| EP | 0753706 | 1/1997 |
| EP | 0881935 | 12/1998 |
| EP | 1250556 | 10/2002 |
| EP | 1637810 | 3/2006 |
| EP | 1778418 | 2/2007 |
| FI | 58971 | 1/1981 |
| FR | 2008451 | 1/1970 |
| FR | 2301778 | 9/1976 |
| FR | 2705766 | 2/1994 |
| GB | 1544445 | 4/1979 |
| GB | 2054143 | 2/1981 |
| GB | 2132335 | 7/1984 |
| GB | 2266340 | 10/1993 |
| HK | 1019417 | 2/2000 |
| JP | 51-132645 | 11/1976 |
| JP | 60-213753 | 10/1985 |
| JP | 63-091442 | 4/1988 |
| JP | 63-251741 | 10/1988 |
| JP | 10-084039 | 3/1989 |
| JP | 02-033552 | 2/1990 |
| JP | 32-047937 | 11/1991 |
| JP | 40-000140 | 1/1992 |
| JP | 40-062347 | 2/1992 |
| JP | 40-068242 | 3/1992 |
| JP | 41-013143 | 4/1992 |
| JP | 52-048645 | 9/1993 |
| JP | 10-288371 | 10/1998 |
| JP | H11-514734 | 12/1999 |
| JP | 2000-081216 | 3/2000 |
| JP | 2002-089859 | 3/2002 |
| JP | 2003-519771 | 6/2003 |
| JP | 2003-269770 | 9/2003 |
| NL | 7601862 | 2/1976 |
| SE | 7602168 | 8/1976 |
| SE | 7904443 | 11/1980 |
| WO | 86/06154 | 10/1986 |
| WO | 91/17803 | 11/1991 |
| WO | 92/08082 | 5/1992 |
| WO | 97/48479 | 12/1997 |
| WO | 01/51857 | 7/2001 |
| WO | 01/83125 | 11/2001 |
| WO | 01/84054 | 11/2001 |
| WO | 02/14728 | 2/2002 |
| WO | 02/14746 | 2/2002 |
| WO | 03/056252 | 7/2003 |
| WO | 2005/019736 | 3/2005 |
| WO | 2005/114059 | 12/2005 |
| WO | 2006/002190 | 1/2006 |
| WO | 2006/012628 | 2/2006 |
| WO | 2006/074420 | 7/2006 |
| WO | 2006/074425 | 7/2006 |
| WO | 2007/121461 | 10/2007 |
| WO | 2008/157418 | 12/2008 |
| WO | 2009/092077 | 7/2009 |
| WO | 2009/129539 | 10/2009 |

OTHER PUBLICATIONS

Abstract for Gidaspow, D. "Multiphase Flow and Fluidization-Continuum and Kinetic Theory Descriptions", Academic Press 1994.

Saravelou et al., "Detailed Modeling of a Swirling Coal Flame", *Combustion Science and Technology*, 1997, 123: pp. 1-22.

Morsi et al., "An Investigation of Particle Trajectories in Two-Phase Flow Systems", *Journal of Fluid Mechanics*, 1972, 55: pp. 193-208.

Abstract for Tennekes et al., "A First Course of Turbulence", Mass. Inst. Tech., 1972.

Prosecution history of U.S. Appl. No. 07/010,277, now U.S. Patent No. 4,811,724.

Non-Final Office Action, dated May 28, 2010, in U.S. Appl. No. 12/407,686.

Translation of foreign patent document DE 4203916.

Skimm, G.K., *Technician's Guide to HVAC*, 1995, McGraw-Hill, pp. 322-330.

* cited by examiner

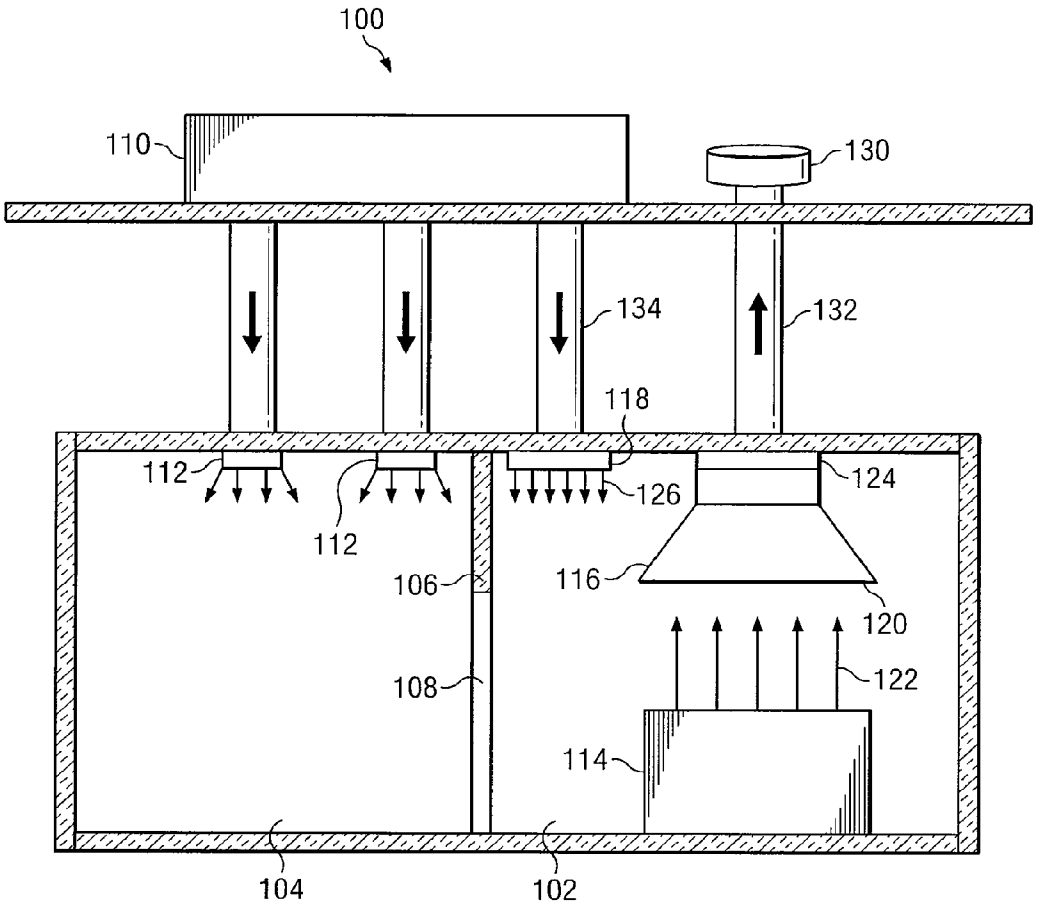
100
110
130
134
132
118
112
112
126
124
106
116
120
108
122
114
104
102

*FIG. 1*

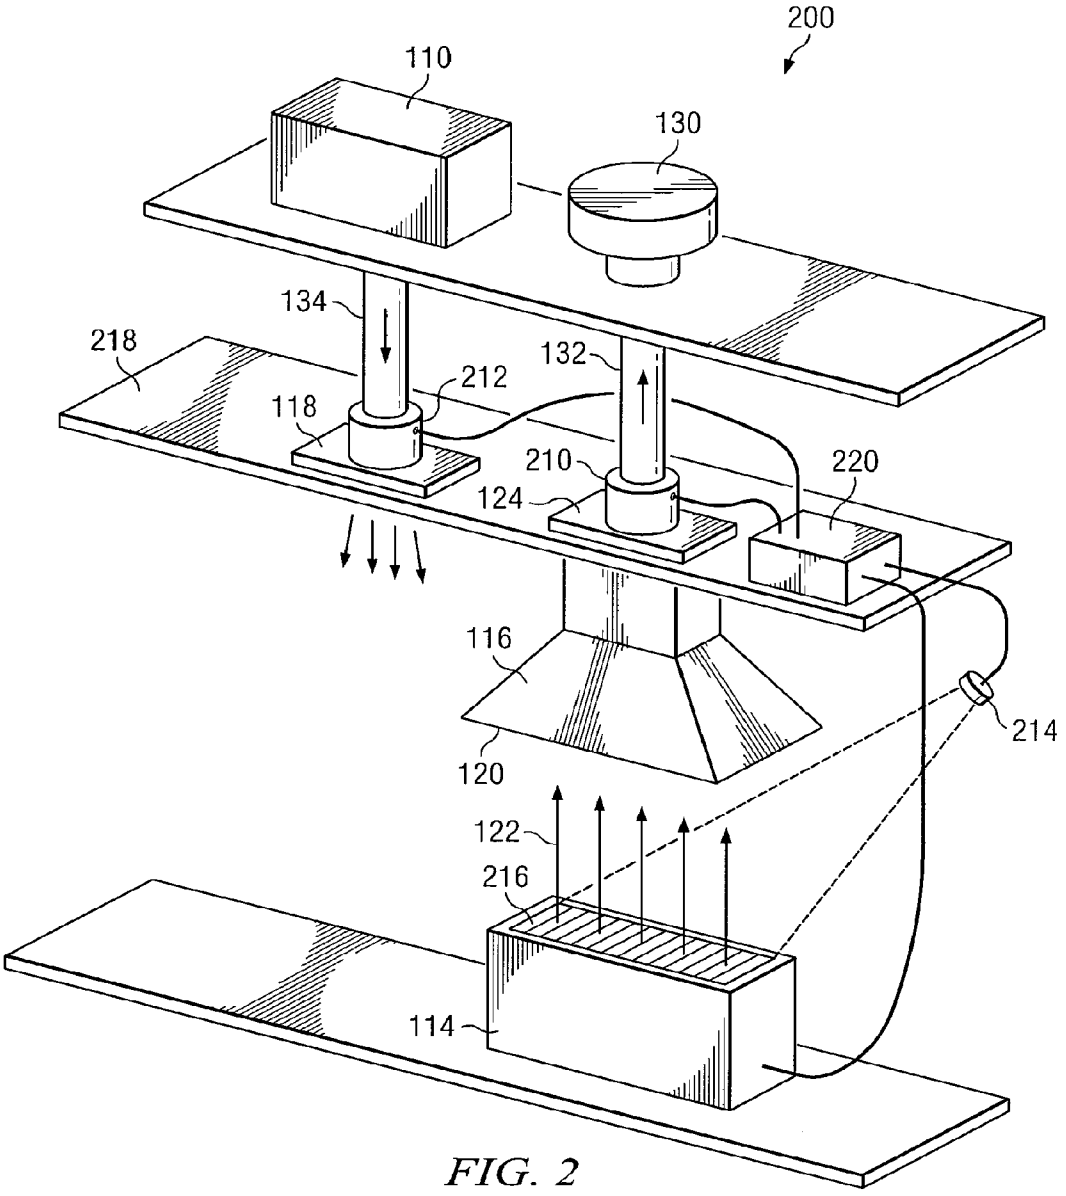
200
110
130
134
218
132
212
118
210
220
124
116
214
120
122
216
114

*FIG. 2*

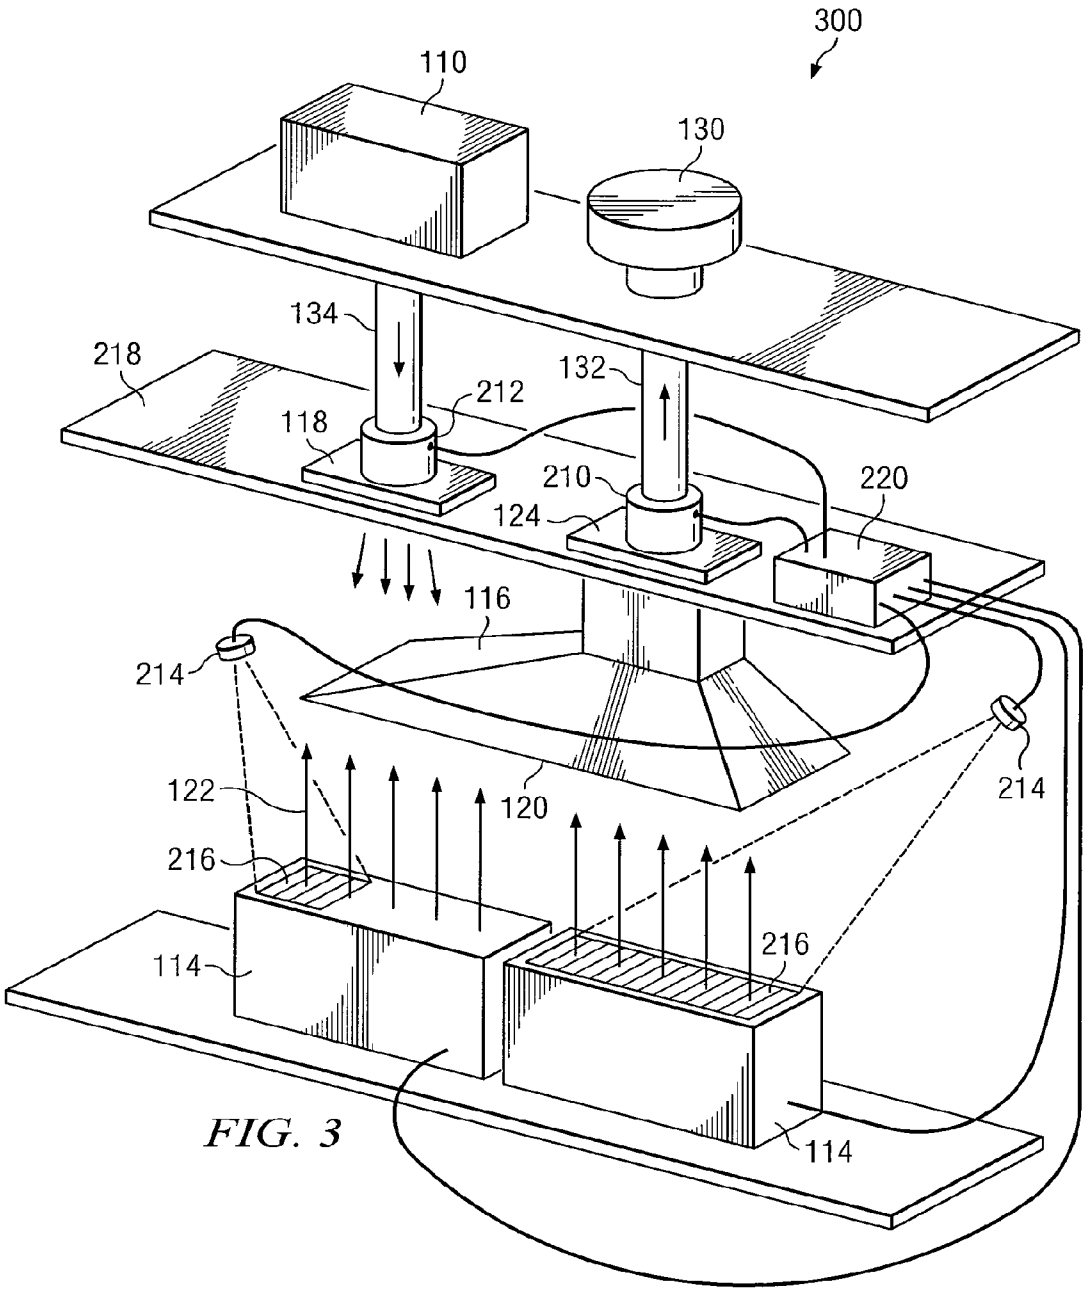
300
110
130
134
218
132
212
118
210
220
124
116
214
122
120
214
216
216
114
114

*FIG. 3*

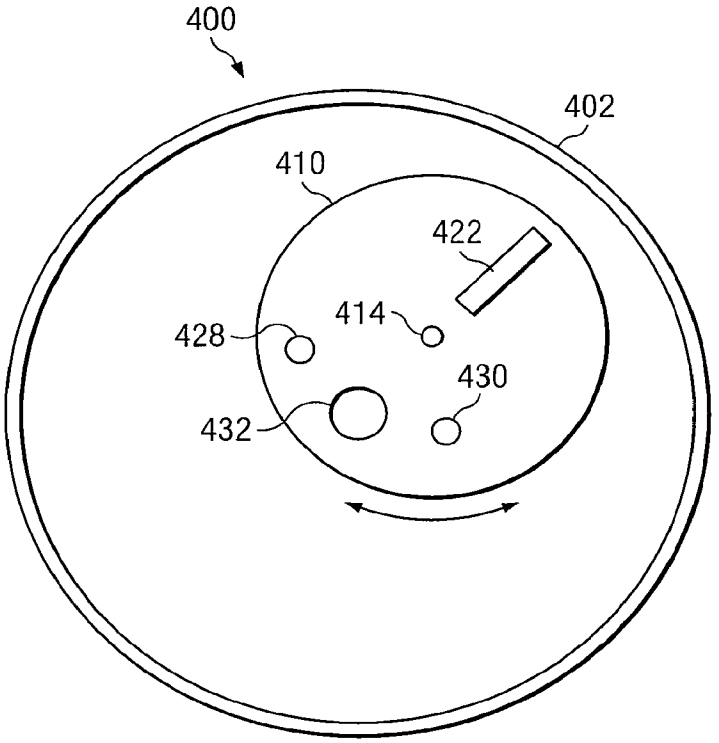
400
402
410
422
414
428
430
432

FIG. 4A

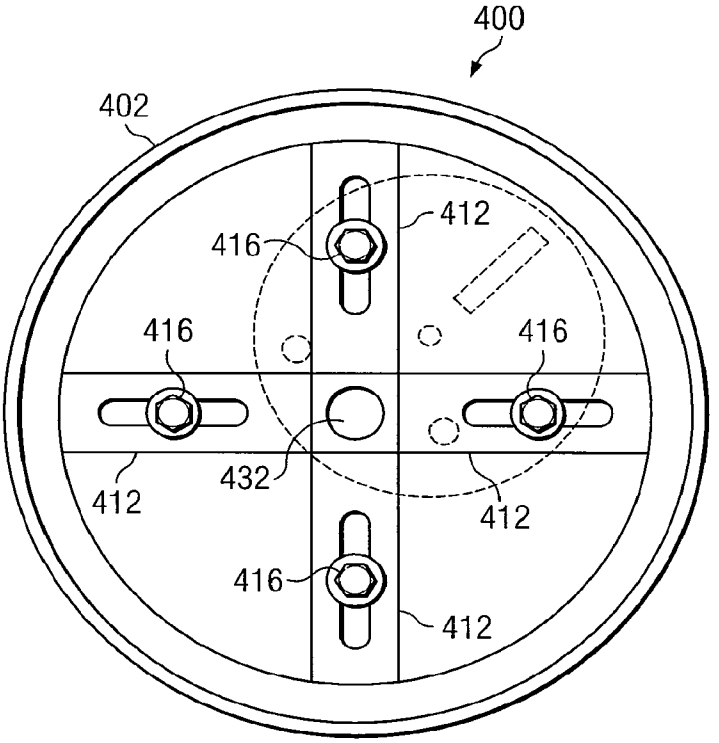
400
402
412
416
416
416
432
412
412
416
412

FIG. 4B

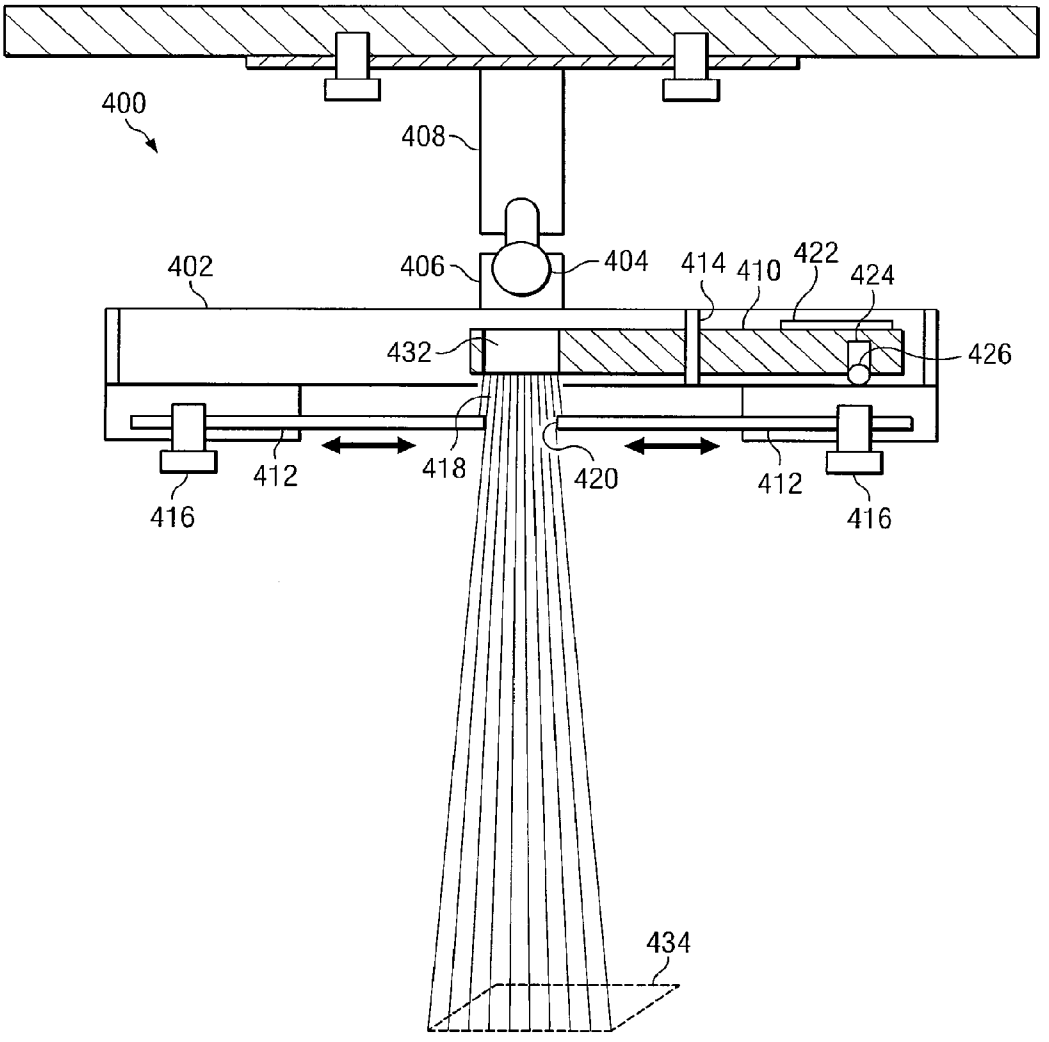
400
408
402
406
404
414
410
422
424
426
432
412
418
420
412
416
416
434

*FIG. 4C*

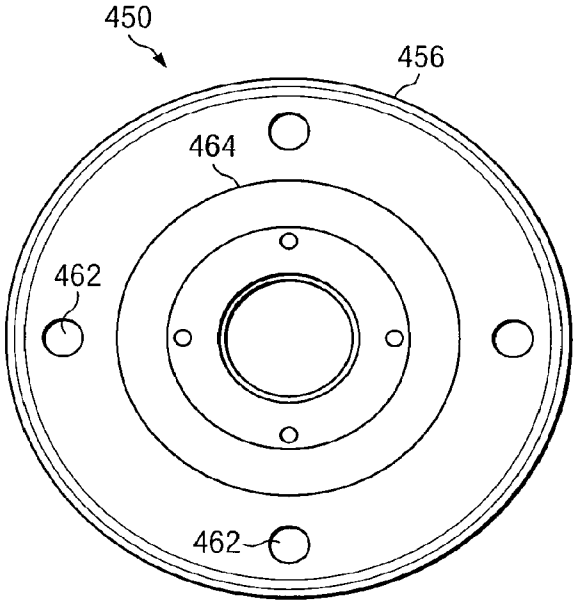
450
456
464
462
462

FIG. 5A

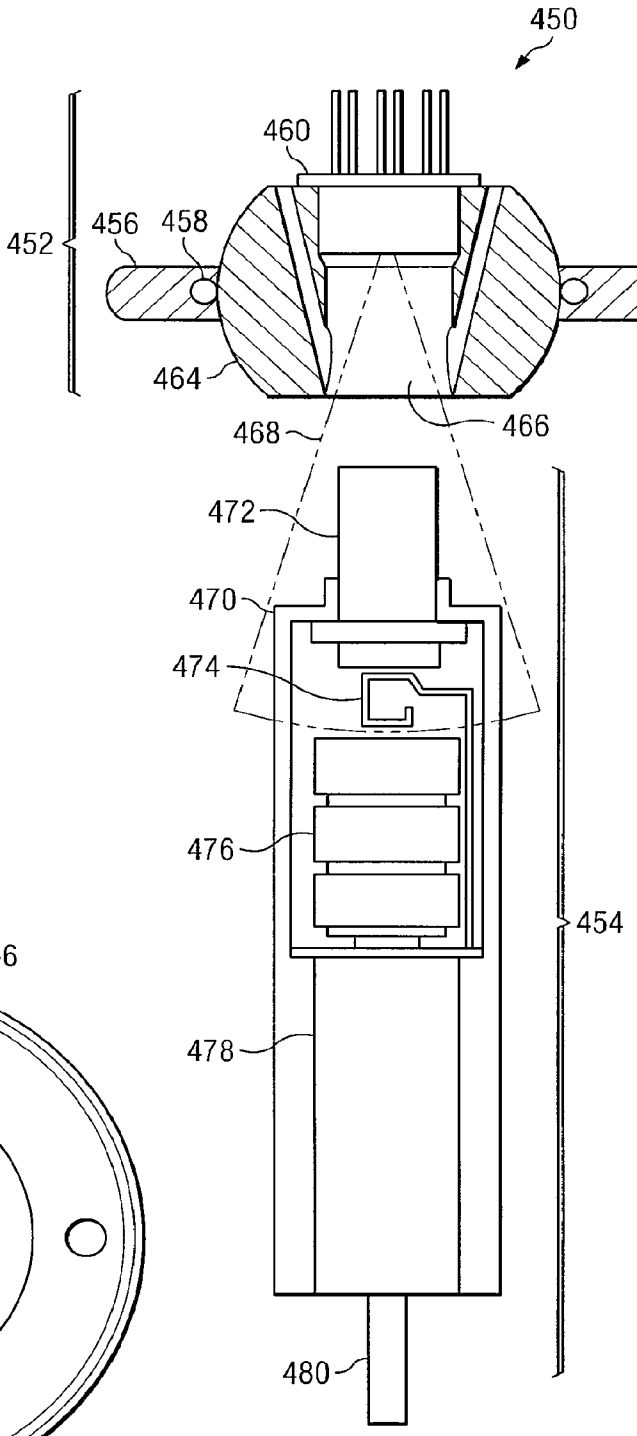
450
460
452
456
458
464
468
466
472
470
474
476
454
478
480

FIG. 5B

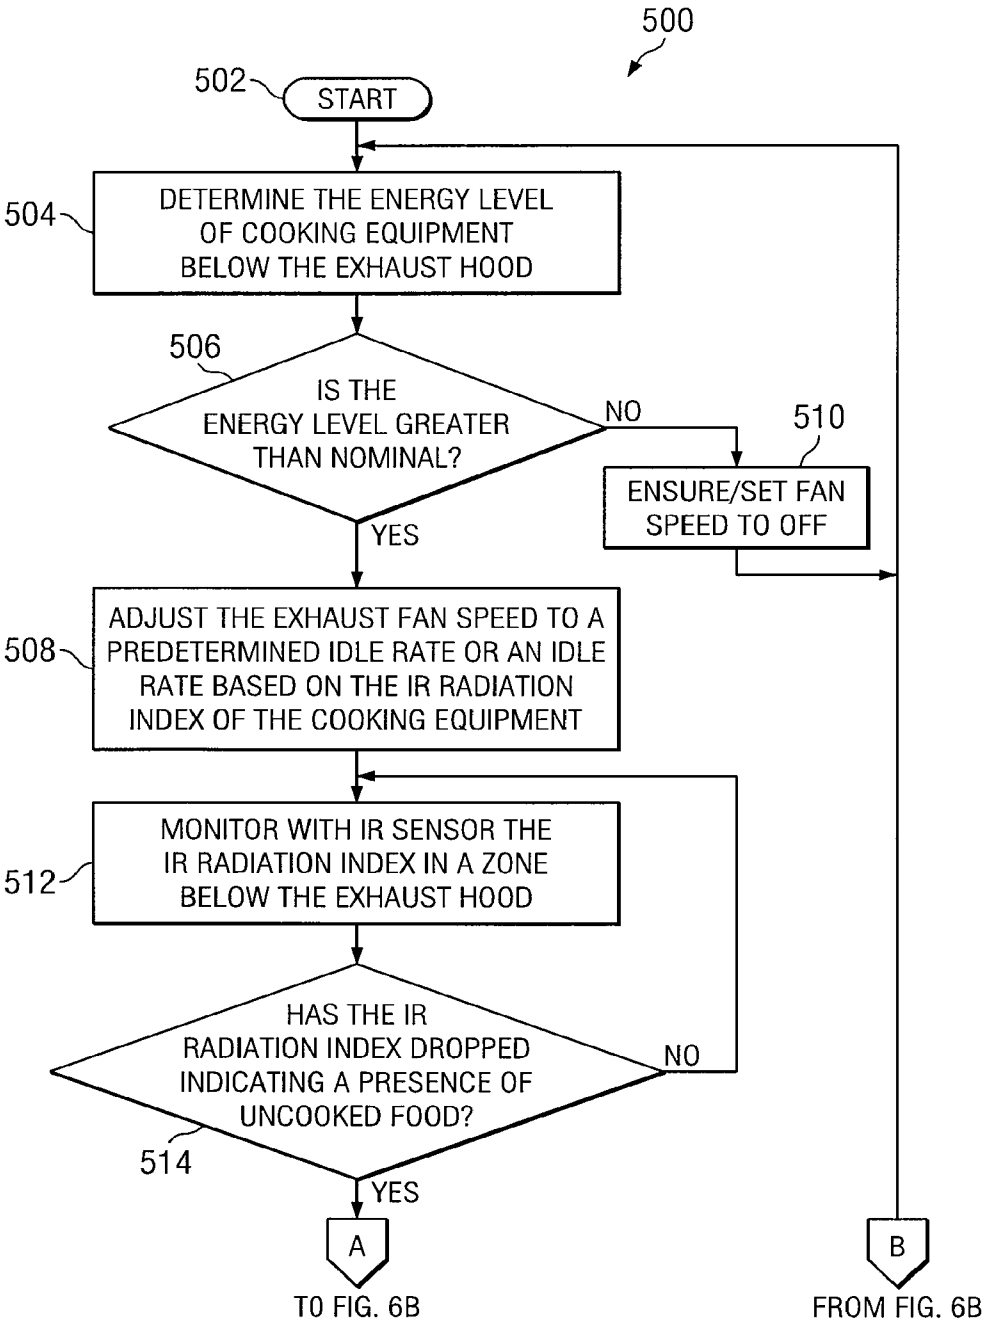
500
502
START
504
DETERMINE THE ENERGY LEVEL OF COOKING EQUIPMENT BELOW THE EXHAUST HOOD
506
IS THE ENERGY LEVEL GREATER THAN NOMINAL?
NO
510
ENSURE/SET FAN SPEED TO OFF
YES
508
ADJUST THE EXHAUST FAN SPEED TO A PREDETERMINED IDLE RATE OR AN IDLE RATE BASED ON THE IR RADIATION INDEX OF THE COOKING EQUIPMENT
512
MONITOR WITH IR SENSOR THE IR RADIATION INDEX IN A ZONE BELOW THE EXHAUST HOOD
HAS THE IR RADIATION INDEX DROPPED INDICATING A PRESENCE OF UNCOOKED FOOD?
NO
514
YES
A
TO FIG. 6B
B
FROM FIG. 6B

*FIG. 6A*

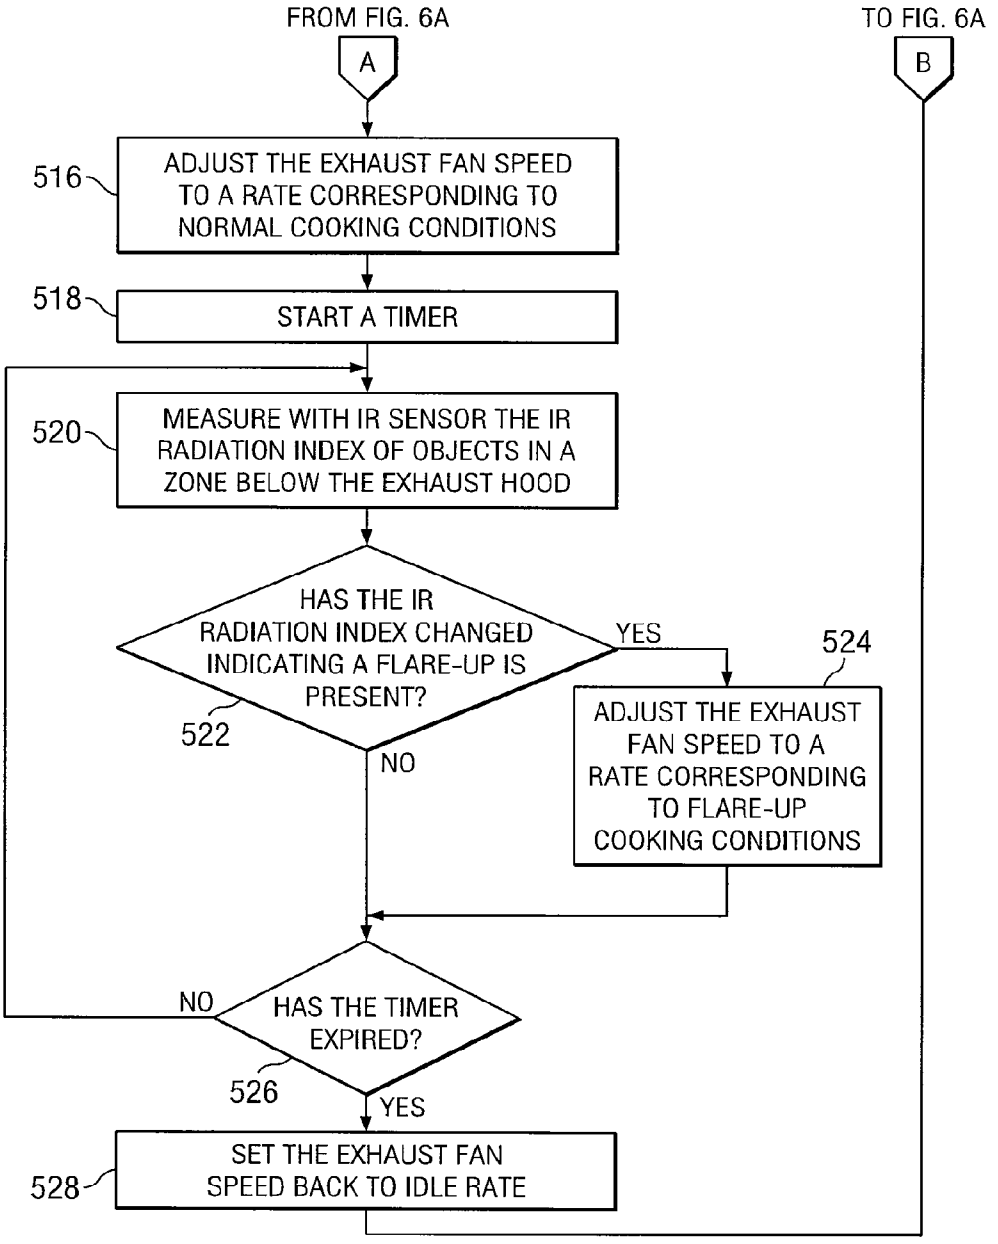
FROM FIG. 6A
A
TO FIG. 6A
B
516
ADJUST THE EXHAUST FAN SPEED TO A RATE CORRESPONDING TO NORMAL COOKING CONDITIONS
518
START A TIMER
520
MEASURE WITH IR SENSOR THE IR RADIATION INDEX OF OBJECTS IN A ZONE BELOW THE EXHAUST HOOD
HAS THE IR RADIATION INDEX CHANGED INDICATING A FLARE-UP IS PRESENT?
522
YES
524
ADJUST THE EXHAUST FAN SPEED TO A RATE CORRESPONDING TO FLARE-UP COOKING CONDITIONS
NO
HAS THE TIMER EXPIRED?
526
NO
YES
528
SET THE EXHAUST FAN SPEED BACK TO IDLE RATE

*FIG. 6B*

# AUTONOMOUS VENTILATION SYSTEM

## CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a continuation of Application No. 11/947,924 filed Nov. 30, 2007. This application also claims the benefit under 35 U.S.C. §119(e) of U.S. Provisional Application No. 60/968,395 filed Aug. 28, 2007, entitled "Smart Kitchen Ventilation Hood with Thermopile Sensor." The entire content of each of the foregoing applications is hereby incorporated by reference into the present application.

## TECHNICAL FIELD

This disclosure relates in general to control systems and more particularly to an autonomous ventilation system.

## BACKGROUND

Ventilation systems are commonly found in modern residential, restaurant, and commercial kitchens. Heat, smoke, and fumes are an ordinary byproduct of cooking many foods and must be removed in order to protect the health and comfort of those present in the kitchen and adjacent areas. Ventilation systems provide an effective way to capture excessive heat, smoke, and fumes generated in kitchens and ventilate them to the atmosphere where they pose no threat to health or safety.

A typical ventilation system consists of an exhaust hood positioned over pieces of cooking equipment that are known to produce heat, smoke, or fumes. This exhaust hood is usually connected via ducts to an exhaust fan and in turn to a vent located on the outside of the building housing the kitchen. The exhaust fan is operated in a way to create a flow of air from the exhaust hood to the outside vent. This creates a suction effect at the exhaust hood that captures the air and any airborne contaminants around the hood. Consequently, any heat, smoke, or fumes generated by the cooking equipment will rise up to the overhead exhaust hood where it will be captured by the suction and transported out of the kitchen to the outside vent. There, it will dissipate harmlessly into the atmosphere.

Most ventilation systems must be manually activated and deactivated by the user. In a typical fast-food restaurant, for example, an employee must manually activate the kitchen ventilation system early in the day or before any cooking occurs. The system will then remain active in order to capture any smoke or fumes that may result from cooking. The system must then be manually deactivated periodically, at the end of the day, or after all cooking has ceased. This manual operation of the ventilation system typically results in the system being active at times when ventilation is not actually required. This needlessly wastes energy not only associated with the operation of the ventilation system, but also due to the ventilation of uncontaminated air supplied to the kitchen by a heating and cooling system. By operating when no smoke or fumes are present, the ventilation system will remove other valuable air that was supplied to heat or cool the kitchen and thus cause the heating and cooling system to operate longer than it would have otherwise.

## SUMMARY OF THE DISCLOSURE

The present disclosure provides an autonomous ventilation system that substantially eliminates or reduces at least some of the disadvantages and problems associated with previous methods and systems.



According to one embodiment, an autonomous ventilation system includes a variable-speed exhaust fan, a controller, an exhaust hood, and an infrared radiation ("IR") sensor. The exhaust fan removes air contaminants from an area. The controller is coupled to the exhaust fan and adjusts the speed of the exhaust fan. The exhaust hood is coupled to the exhaust fan and directs air contaminants to the exhaust fan. The IR sensor is coupled to the controller, detects changes in IR index in a zone below the exhaust hood, and communicates information relating to detected changes in IR index to the controller. The controller adjusts the speed of the exhaust fan in response to information relating to changes in IR index detected by the IR sensor. Other embodiments also include an alignment laser to visibly indicate a point at which the IR sensor is aimed and a field-of-view ("FOV") indicator to illuminate the zone below the exhaust hood in which the IR sensor detects changes in IR index.

Technical advantages of certain embodiments may include a reduction in energy consumption, an increase in the comfort of the ventilated area, and a decrease in noise. Embodiments may eliminate certain inefficiencies such as needlessly ventilating valuable air from an area that was supplied by a heating, ventilation, and air conditioning ("HVAC") system.

Other technical advantages will be readily apparent to one skilled in the art from the following figures, descriptions, and claims. Moreover, while specific advantages have been enumerated above, various embodiments may include all, some, or none of the enumerated advantages.

## BRIEF DESCRIPTION OF THE DRAWINGS

For a more complete understanding of the present disclosure and its advantages, reference is now made to the following description, taken in conjunction with the accompanying drawings, in which:

FIG. **1** is a simplified block diagram illustrating a facility requiring ventilation in accordance with a particular embodiment;

FIG. **2** is a simplified block diagram illustrating a ventilation system in accordance with a particular embodiment;

FIG. **3** is a simplified block diagram illustrating a ventilation system in accordance with another particular embodiment;

FIG. **4**A-**4**C is an exploded view of an IR sensor assembly in accordance with a particular embodiment;

FIG. **5** is an exploded view of an IR sensor assembly in accordance with a another particular embodiment; and

FIG. **6** is a method of controlling a ventilation system in accordance with a particular embodiment.

## DETAILED DESCRIPTION OF THE DISCLOSURE

FIG. **1** depicts a facility **100** where a particular embodiment may be utilized. Facility **100** may be a restaurant, for example, that includes a kitchen **102** and at least one adjacent room **104** separated by a wall **106**. Wall **106** contains a doorway **108** that allows access between kitchen **102** and adjacent room **104**. Facility **100** also includes an HVAC system **110** that provides conditioned air to the interior of facility **100** via interior vents **112**. Kitchen **102** includes one or more pieces of cooking equipment **114**, an exhaust hood **116**, a ceiling supply air vent **118**, and a ceiling exhaust vent **124**. Examples of cooking equipment **114** include, but are not limited to, stoves, cooktops, ovens, fryers, and broilers. Exhaust hood **116** is oriented such that a downward-facing opening **120** is operable to direct an air contaminant **122** associated with the

operation of cooking equipment **114** through ceiling exhaust vent **124** and ultimately out an exterior exhaust vent **130** via an exhaust duct **132**. Air contaminant **122** includes, but is not limited to, smoke, steam, fumes, and/or heat. Ceiling supply air vent **118** is connected to a supply air duct **134** and is operable to provide supply air **126**. Supply air **126** may be supplied from HVAC system **110** and may include conditioned air (i.e., heated or cooled air) or unconditioned air. Supply air **126** may be supplied in an amount corresponding to the amount of air removed from kitchen **102** via exhaust hood **116** such that the air pressure inside kitchen **102** remains relatively constant.

Removing air contaminant **122** from kitchen **102** helps ensure that kitchen **102**, as well as adjacent room **104**, remains safe, sufficiently free of air contaminant **122**, and at a comfortable temperature for anyone inside. The volume of air exhausted via exhaust hood **116** should be carefully regulated to minimize the quantity of conditioned air (air entering facility **100** through HVAC system **110**) that is vacated from kitchen **102** and facility **100** while ensuring that enough air is ventilated to prevent buildup of air contaminant **122**. Because a particular piece of cooking equipment **114** may not be in use at all times and thus will not continuously generate air contaminant **122**, it becomes beneficial to vary the rate at which exhaust hood **116** ventilates air contaminant **122** from kitchen **102** as well as the rate at which ceiling supply air vent **118** supplies air to kitchen **102** as a means to conserve energy and increase occupant safety and comfort. The embodiments discussed below provide a convenient alternative to manually activating a ventilation system as the level of air contaminants fluctuates.

While facility **100** has been described in reference to a restaurant, it should be noted that there are many facilities in need of such ventilation systems. Such facilities include manufacturing facilities, industrial facilities, residential kitchens, and the like. Likewise, embodiments in this disclosure are described in reference to kitchen **102**, but could be utilized in any facility requiring ventilation.

FIG. **2** depicts an autonomous ventilation system **200** as would be located inside kitchen **102** in accordance with a particular embodiment. Autonomous ventilation system **200** includes exhaust hood **116** with downward-facing opening **120**. Exhaust hood **116** is coupled to ceiling exhaust vent **124** and is positioned above one or more pieces of cooking equipment **114**. Air is drawn up through exhaust hood **116** via downward-facing opening **120** by an exhaust fan **210**. Exhaust fan **210** may be positioned anywhere that allows it to draw air up through exhaust hood **116** including, but not limited to, inside exhaust hood **116** and exhaust duct **132**. Autonomous ventilation system **200** also includes ceiling supply air vent **118** that can supply conditioned or unconditioned air to kitchen **102** from HVAC system **110**. Air is supplied to kitchen **102** by a supply air fan **212** that is located in a position so as to create a flow of air through supply air duct **134** and ultimately out ceiling supply air vent **118**. Autonomous ventilation system **200** also includes an IR sensor **214** that can detect IR index (the heat signature given off by an object) fluctuations in or about a cooking zone **216** associated with cooking equipment **114** beneath exhaust hood **116**. According to a particular embodiment, IR sensor **214** is a thermopile sensor for remotely sensing infrared radiation changes in cooking zone **216**. IR sensor **214**, however, may be any type of IR sensor and is not limited in scope to a thermopile sensor. IR sensor **214** may be mounted inside exhaust hood **116**, on top of exhaust hood **116**, on a ceiling **218**, or in any other position that allows it to detect IR index fluctuations in cooking zone **216** beneath exhaust hood **116**. Cooking zone **116** may envelop an area adjacent to cooking equipment **114** or any portion of cooking equipment **114**.

Autonomous ventilation system **200** is controlled by a controller **220**. Controller **220** is coupled to IR sensor **214**, exhaust fan **210**, supply air fan **212**, and/or cooking equipment **114**. Controller **220** has auto-calibration and control logic that may be heuristically adjusted from observation of the environment, as discussed below. Controller **220** communicates with IR sensor **214** to observe the environment and determine IR index fluctuations in or about cooking zone **216**. Controller **220** also communicates with exhaust fan **210** to control its speed and consequently the rate of ventilation of autonomous ventilation system **200**. In some embodiments, controller **220** additionally communicates with supply air fan **212** to control its speed and thus the amount of air that is re-supplied to kitchen **102**. Controller **220** may also be coupled to cooking equipment **114** in order to determine when it has been turned on and off.

In operation, controller **220** automatically adjusts the speed of exhaust fan **210** and thus the ventilation rate of autonomous ventilation system **200** based on a schedule and/or certain conditions sensed by IR sensor **214**. These conditions may include the energy level of cooking equipment **114**, the state of IR sensor **214**, the introduction of uncooked food into cooking zone **216**, and/or the presence of excessive amounts of air contaminant **122**.

First, controller **220** may turn exhaust fan **210** on and off and/or adjust its speed based on the energy level of cooking equipment **114**. Controller **220** may observe cooking equipment **114** with IR sensor **214** and determine an average IR index for the cooking surface or cooking medium when it is not in use. When a user then activates cooking equipment **114**, controller **220** may detect via IR sensor **214** the increase in the IR index of the cooking surface or the cooking medium and set the rate of exhaust fan **210** to an idle rate. This idle rate may be a fixed predetermined speed or it may be a speed based on the IR index as measured by IR sensor **214**. Conversely, controller **220** may decrease the speed or completely turn off exhaust fan **210** when it is determined via IR sensor **214** that cooking equipment **114** has been turned off. To determine if cooking equipment **114** has been turned off, controller **220** may determine that the IR index of the cooking surface or cooking medium of cooking equipment **114** has decreased to or towards the typical IR index when not in use. In some embodiments, controller **220** may be additionally or alternatively coupled to cooking equipment **114** to detect when it has been activated and deactivated. By automatically controlling the ventilation rate based on the energy level of cooking equipment **114**, autonomous ventilation system **200** alleviates disadvantages of other ventilation systems such as wasted energy and unnecessary noise.

In some embodiments, controller **220** may additionally or alternatively adjust the speed of exhaust fan **210** based on the state of IR sensor **214**. In this configuration, controller **220** monitors whether sensor **214** has been activated by a user. When a user activates IR sensor **214**, controller **220** will set the speed of exhaust fan **210** to a predetermined idle rate or a rate based on the IR index measured by IR sensor **214**. In addition, a user may choose to override IR sensor **214** altogether. By pushing the appropriate override button, a user may choose to override IR sensor **214** and manually force controller **220** to increase the speed of exhaust fan **210**. This allows the user manual control of autonomous ventilation system **200** when desired.

In addition or alternatively, controller **220** of autonomous ventilation system **200** may set the speed of exhaust fan **210** to a predetermined normal cooking rate when IR sensor **214**

detects a drop in IR index in all or part of cooking zone **216** due to the introduction of uncooked or cold food. As examples only, IR sensor **214** may detect a drop in IR index in all or part of cooking zone **216** due to cold and/or uncooked food being placed over an active burner, cold and/or uncooked food (such as frozen hamburger patties) being placed at the input to a broiler, or uncooked french fries being placed into a fryer. As a result of detecting such an event and setting the speed of exhaust fan **210** to a predetermined normal cooking rate, autonomous ventilation system **200** will be operational and will ventilate any airborne contaminant **122** that may result in the ensuing cooking session.

Controller **220** may additionally or alternatively set the speed of exhaust fan **210** to a predetermined flare-up rate when IR sensor **214** detects a change in IR index in cooking zone **216** due to a flare-up in cooking. Such changes in IR index may include a decrease due to the presence of excessive amounts of air contaminant **122** such as smoke or vapor or it may be an increase due to the presence of excessive heat and/or flames. Conversely, controller **220** may decrease the speed or completely turn off exhaust fan **210** after a predetermined amount of cooking time or when IR sensor **214** detects an IR index corresponding to a low, non-cooking, or non flare-up condition. This will additionally increase the energy efficiency and comfort level of the kitchen while minimizing unneeded noise.

The idle, cooking, and flare-up rates of exhaust fan **210** may be determined in a variety of ways. For example, these rates may be preset and/or preprogrammed into controller **220** based on the type of cooking equipment and/or the type of food being cooked under exhaust hood **116**. A user may also determine and/or adjust these rates heuristically by observing the operation of autonomous ventilation system **200** in the environment in which it is installed. Pre-determined times for particular cooking equipment could also be provided from a manufacturer or standards body. It should also be noted that even though three distinct rates have been identified, it is intended that the present disclosure encompass other rates as well. For example, controller **220** may gradually increase the rate of exhaust fan **210** over time from a lower rate such as the idle rate to a higher rate such as the cooking rate. Likewise, it may gradually decrease the rate of exhaust fan **210** over time from a higher rate such as the flare-up rate to a lower rate such as the cooking rate.

In some embodiments, controller **220** may also automatically control the speed of supply air fan **212** to provide a desired pressurization of kitchen **102**. For example, it may set the speed of supply air fan **212** to match the speed of exhaust fan **210**. As a result, the rate at which air is removed and supplied to kitchen **102** is approximately equal and thus the temperature and air pressure remains relatively constant. Controller **220** may also set the speed of supply air fan **212** to a speed that is greater than the speed of exhaust fan **210** to create positive pressure in kitchen **102**. This ensures that the environment in kitchen **102** remains safe and comfortable regardless of how much air is being ventilated through exhaust hood **116**.

Exhaust fan **210** and supply air fan **212** may be powered by various types of motors including, but not limited to, AC single-phase electrical motors, AC three-phase electrical motors, and DC electrical motors. The speeds of exhaust fan **210** and supply air fan **212** may be adjusted by controller **220** by modulating the frequency of the output of a variable frequency drive in the case of AC single-phase or three-phase electrical motors, by a phase cut modulation technique in the case of a single-phase motor, or by changing voltage in case of a DC electrical motor.

With reference now to FIG. **3**, an additional embodiment of an autonomous ventilation system is provided. In this embodiment, an autonomous ventilation system **300** is operable to ventilate air contaminant **122** produced from more than one piece of cooking equipment **114**. Autonomous ventilation system **300** comprises the same components described above in reference to autonomous ventilation system **200**, but with minor modifications. In this embodiment, more than one IR sensor **214** and more than one piece of cooking equipment **114** are coupled to controller **220**. Each IR sensor **214** can detect IR index fluctuations in or about a corresponding cooking zone **216** beneath exhaust hood **116**. Exhaust hood **116** is positioned above the more than one piece of cooking equipment **114** and directs air contaminants **122** to ceiling exhaust vent **124**.

In operation, controller **220** of autonomous ventilation system **300** adjusts the speed of exhaust fan **210** based on a schedule or certain conditions sensed by IR sensors **214** in a similar manner as described above in reference to autonomous ventilation system **200**. For example, controller **220** may set the rate of exhaust fan **210** to an appropriate rate when any IR sensor **214** detects a change in the level of energy of any piece of cooking equipment **114** under exhaust hood **116**. Controller **220** may set the speed of exhaust fan **210** to the default idle rate when it is determined via IR sensors **214** that any piece of cooking equipment **114** under exhaust hood **116** has been activated. Conversely, controller **220** may decrease the speed or completely turn off exhaust fan **210** when it is determined via IR sensors **214** that some or all of cooking equipment **114** has been turned off. In addition, controller **220** of autonomous ventilation system **300** may set the speed of exhaust fan **210** to a predetermined cooking rate based on the IR index in all or part of cooking zones **216** as determined by IR sensors **214**. In this situation, controller **220** first determines the appropriate rate for each individual piece of cooking equipment **114**. Such rates include, for example, the normal cooking rate and the flare-up rate as described above in reference to autonomous ventilation system **200**. Controller **220** then sets the speed of exhaust fan **210** to the sum of the required rates of each of the pieces of cooking equipment **114** under exhaust hood **116** (or any other suitable speed including one based on the size and shape of exhaust hood **116** or the type of cooking equipment **114**.) Controller **220** may conversely decrease the speed or completely turn off exhaust fan **210** after a predetermined amount of cooking time or when IR sensors **214** detect an IR index corresponding to a low, non-cooking, or non flare-up condition under exhaust hood **116**.

Modifications, additions, or omissions may be made to autonomous ventilation system **300** and the described components. As an example, while FIG. **3** depicts two pieces of cooking equipment **114**, two IR sensors **214**, and two cooking zones **216**, autonomous ventilation system **300** may be modified to include any number and combination of these items. Additionally, while certain embodiments have been described in detail, numerous changes, substitutions, variations, alterations and modifications may be ascertained by those skilled in the art. For example, while autonomous ventilation systems **200** and **300** have been described in reference to kitchen **102** and cooking equipment **114**, certain embodiments may be utilized in other facilities where ventilation is needed. Such facilities include manufacturing facilities, industrial facilities, residential kitchens, and the like. It is intended that the present disclosure encompass all such changes, substitutions, variations, alterations and modifications as falling within the spirit and scope of the appended claims.

FIGS. **4**A through **4**C depict an IR sensor assembly **400**, which could be utilized as IR sensor **214**, discussed above in connection with FIGS. **2** and **3**. FIG. **4**A provides a top view of IR sensor assembly **400**, FIG. **4**B provides a bottom view of IR sensor assembly **400**, and FIG. **4**C provides a side view of IR sensor assembly **400**.

IR sensor assembly **400** includes a housing **402**, a ball joint **404**, a ball joint bracket **406**, and a mounting bracket **408**. Ball joint **404** is coupled to mounting bracket **408** and housing **402** is coupled to ball joint bracket **406**. Ball joint **404** fits inside ball joint bracket **406** and allows coupled housing **402** to rotate freely about ball joint **404**.

Housing **402** includes a rotating turret **410**, aperture shunts **412**, an axle pin **414**, aperture set screws **416**, a fixed aperture **418**, and an adjustable aperture **420**. Fixed aperture **418** is located on one side of housing **402** and allows light and infrared radiation to pass in and out of housing **402**. Aperture shunts **412** are affixed adjacent to fixed aperture **418** with aperture set screws **416**. Aperture set screws **416** may be manually adjusted in a way that allows aperture shunts **412** to slide and block a portion, none, or all of the light that exits housing **402** via fixed aperture **418**. The ends of aperture shunts **412** form adjustable aperture **420** whose shape may be manipulated by adjusting the position of one or more aperture shunts **412**. Aperture shunts **412** may be black or otherwise dark in color to reduce disturbances in the light emitted from adjustable aperture **420**.

Rotating turret **410** includes a rotation handle **422**, a retention spring **424**, a retention bearing **426**, an alignment laser **428**, a field-of-view ("FOV") indicator **430**, and a thermopile sensor **432**. Rotation handle **422** is affixed to rotating turret **410** and rotating turret **410** is affixed to housing **402** via axle pin **414**. Rotating turret **410** is operable to rotate about axle pin **414** by grasping and applying force to rotation handle **422**. Retention spring **424** is affixed to rotating turret **410** and is subsequently coupled to retention bearing **426**. Retention spring **424** applies pressure to retention bearing **426** that is in contact with housing **402**. This pressure creates resistance to the movement of rotating turret **410** and thus ensures rotating turret **410** does not rotate without sufficient force by the user. Alignment laser **428**, FOV indicator **430**, and thermopile sensor **432** are affixed to rotating turret **410** in such a way that each may be aligned with fixed aperture **418**. When rotating turret **410** is rotated into the appropriate position, alignment laser **428**, FOV indicator **430**, and thermopile sensor **432** may each have a clear line-of-sight out of housing **402** via fixed aperture **418**.

In operation, IR sensor assembly **400** is mounted with mounting bracket **408** in a location where it has a clear line-of-sight to an area to be monitored for IR index fluctuations. Once mounted in a desired location, housing **402** may be adjusted by pivoting housing **402** about ball joint **404**. This allows three dimensional adjustments to aim IR sensor assembly **400** at the desired location. To select one of the attached instruments including alignment laser **428**, FOV indicator **430**, and thermopile sensor **432**, the user grasps rotation handle **422** and rotates rotating turret **410** about axle pin **414** until the desired instrument is aligned with fixed aperture **418**. This allows the selected instrument to have a clear line-of-sight out of housing **402**.

To ensure IR sensor assembly **400** is aimed at the correct location to be monitored for IR index fluctuations, the user would first rotate rotating turret **410** to select FOV indicator **430**. FOV indicator **430** may be any visible light emitting device including, but not limited to, a bright light LED. Once FOV indicator **430** is selected and activated, it will shine light out of housing **402** via fixed aperture **418**. The result will be a field of view **434** which is a pattern of light on an object in the line-of-sight of FOV indicator **430** in the shape of fixed aperture **418**. This corresponds with the field of view of thermopile sensor **432** when such sensor is rotated into position in line with aperture **418**/**420**.

Initially, adjustable aperture **420** is larger in size than fixed aperture **418** and thus the shape of field of view **434** is controlled by fixed aperture **418**. However, adjustable aperture **420** may be adjusted to overlap fixed aperture **418** in order to adjust the shape of field of view **434**. The shape of adjustable aperture **420** and field of view **434** may be adjusted via aperture shunts **412** so that field of view **434** coincides with the desired area to be monitored for IR index fluctuations. In one embodiment, IR sensor assembly **400** is utilized as IR sensor **214** in autonomous ventilation system **200**. Field of view **434** corresponds to cooking zone **216** and coincides with an area associated with cooking equipment **114** beneath exhaust hood **116**. Field of view **434** may envelop any area associated with cooking equipment **114** including an area adjacent to cooking equipment **114** where uncooked food products are loaded for cooking, a portion of the surface of cooking equipment **114**, or the entire surface of cooking equipment **114**. To adjust the shape of field of view **434**, one or more aperture set screws **416** are loosened to allow the associated aperture shunt **412** to slide freely. One or more aperture shunts **412** are adjusted so that one end overlaps fixed aperture **418**. By overlapping fixed aperture **418**, aperture shunts **412** will block light emitted via fixed aperture **418** and thus affect and control the shape of field of view **434**. Once aperture shunts **412** are in the desired position and field of view **434** is in the desired shape, aperture set screws **416** are then tightened to secure aperture shunts from further movement and set the shape of adjustable aperture **420**.

Once field of view **434** has been adjusted to match the area in which IR index fluctuations are to be monitored, the user may then rotate rotating turret **410** in order to use alignment laser **428** and/or thermopile sensor **432**. For example, the user may rotate rotating turret **410** to align alignment laser **428** with fixed aperture **418**. Alignment laser **428** may be any type of visible laser including a visible light laser diode. Once activated, alignment laser **428** will produce a point of light on any object in its line-of-sight. If IR sensor assembly **400** is aimed at a piece of equipment that is movable, this point of light produced by alignment laser **428** may be used to realign the piece of equipment back to the same position each time after it is moved. To do this, the user marks on the piece of equipment the location of the point of light produced by alignment laser **428** when it is in the desired position. After moving, the user would then reposition the piece of equipment so that the mark aligns with the point of light produced by alignment laser **428**. This allows the piece of equipment to be easily realigned to the same position every time and prevents the user from having to continuously readjust field of view **434**.

In addition, once field of view **434** has been adjusted to match the area in which IR index fluctuations are to be monitored, the user may rotate rotating turret **410** to align thermopile sensor **432** with fixed aperture **418** (this may be done regardless of the use of laser **428** as described above.) Once aligned with fixed aperture **418**, thermopile sensor **432** will have the same field of view **434** as FOV indicator **430**. Since thermopile sensor **432** does not emit visible light, the user would not be able to discern the field of view of thermopile sensor **432** without first utilizing FOV indicator **430**. By utilizing both instruments, the user is able to finely tune the

shape of field of view **434** and precisely select the area in which to monitor IR index fluctuations with thermopile sensor **432**.

Modifications, additions, or omissions may be made to IR sensor assembly **400** and the described components. As an example, IR sensor assembly **400** may be designed to allow one or more of alignment laser **428**, FOV indicator **430**, and thermopile sensor **432** to be utilized at the same time. In such an embodiment, for example, a user may elect to illuminate field of view **434** with FOV indicator **430** while thermopile sensor **432** is monitoring IR index fluctuations in field of view **434**. Other embodiments of IR sensor assembly **400** may not include alignment laser **428** or FOV indicator **430**. Additionally, while certain embodiments have been described in detail, numerous changes, substitutions, variations, alterations and modifications may be ascertained by those skilled in the art, and it is intended that the present disclosure encompass all such changes, substitutions, variations, alterations and modifications as falling within the spirit and scope of the appended claims.

FIG. **5** depicts an IR sensor assembly **450**, which could be also be utilized as IR sensor **214**, discussed above in connection with FIGS. **2** and **3**. IR sensor assembly **450** includes an eyeball housing assembly **452** and a laser calibration assembly **454**.

Eyeball housing assembly **452** includes a retaining bracket **456**, a position-fixing o-ring **458**, and a ball housing **464**. Retaining bracket **456** contains mounting holes **462** that allow it to be attached with fasteners such as screws to any surface. Retaining bracket **456** also contains a round void that is large enough to allow ball housing **464** to partially fit through. Position-fixing o-ring **458** is attached to retaining bracket **456** about the circumference of the round void and makes contact with ball housing **464** when it is placed into the round void. Retaining bracket **456** and position-fixing o-ring **458** together form a socket in which ball housing **464** pivots.

Ball housing **464** contains an aperture **466** and an IR sensor **460**. IR sensor **460** is affixed to ball housing **464** on the opposite side of aperture **466** in such a way that allows it to have a line-of-sight through ball housing **464** and out aperture **466**. IR sensor **460** receives an IR field **468** through ball housing **464** and aperture **466**. IR sensor **460** detects IR index fluctuations inside IR field **468**. IR field **468** is in the shape of aperture **466** which may be any shape including round as shown in FIG. **5**. In some embodiments, the shape of aperture **466** is adjustable by a user similar to how the airflow of an eyeball air vent is adjusted on many commercial airlines.

Laser calibration assembly **454** includes a housing **470**, an activation button **472**, a spring switch **474**, coin cell batteries **476**, and a diode laser **478**. Housing **470** contains an opening at each end. Diode laser **478** is enclosed inside housing **470** in such a way as to allow it to shine a visible calibration beam **480** through the opening of one end of housing **470**. Activation button **472** is also enclosed inside housing **470** and partially protrudes out of the opening in housing **470** opposite from calibration beam **480**. Activation button **472** is in the shape of aperture **466** on ball housing **464** and is slightly smaller to allow it to easily slide into and out of aperture **466**. For example, activation button **472** may be cylindrical in shape to allow it to fit into an aperture **466** that is round as seen in FIG. **5**. Activation button **472** is also slightly smaller than the opening of housing **470** from which it protrudes. This allows it to move in and out of housing **470** through the opening. A lip adjacent to one end of activation button **472**, however, prevents the button from sliding completely out of housing **470**.

One or more coin cell batteries **476** are positioned adjacent to diode laser **478** inside housing **470**. Enough coin cell batteries **476** are provided to power diode laser **478**, causing it to produce visible calibration beam **480**. Coin cell batteries **476** are positioned inside housing **470** so that only one terminal (positive or negative) of coin cell batteries **476** is coupled to diode laser **478**. Spring switch **474** is positioned inside housing **470** between the other (uncoupled) terminal of coin cell batteries **476** and activation button **472**. It is coupled to diode laser **478** on one end and activation button **472** on the other. A small gap of air exists between spring switch **474** and the uncoupled terminal of coin cell batteries **476** when laser calibration assembly is inactive so that the electrical circuit between coin cell batteries **476** and diode laser **478** is not complete.

In operation, eyeball housing assembly **452** is mounted with retaining bracket **456** in a location where it has a clear line-of-sight to an area to be monitored for IR index fluctuations. Once mounted in a desired location, eyeball housing assembly **452** may be adjusted by pivoting ball housing **464**. This allows three dimensional adjustments to aim IR sensor **460** at the desired location. This is similar in operation to an eyeball air vent that is typical in most commercial airlines. Ball housing **464** pivots about the void in retaining bracket **456** and maintains its position after adjustments due to the pressure applied by position-fixing o-ring **458**.

Because IR sensor **460** produces IR field **468** that is invisible to the human eye, it is difficult to reliably determine exactly where IR sensor assembly **450** is aimed. To alleviate this problem, a user may utilize laser calibration assembly **454**. To do so, a user first inserts the end of laser calibration assembly **454** containing activation button **472** into aperture **466** of ball housing **464**. Activation button **472** will slide into aperture **466** for a certain distance until it comes into contact with a portion of ball housing **464** or IR sensor **460** that impedes its movement. At this point, the user continues to apply pressure to IR sensor assembly **450** in the direction of ball housing **464**. This will cause housing **470** to then slide toward ball housing **464** while activation button **472** remains immobile. This causes the end of activation button **472** inside housing **470** to contact spring switch **474** and in turn causes spring switch **474** to contact the uncoupled terminal of coin cell batteries **476**. This completes the electrical circuit between coin cell batteries **476** and diode laser **478** and produces visible calibration beam **480**. While still grasping laser calibration assembly **454**, the user may then adjust IR sensor assembly **450** by pivoting ball housing **464** about retaining bracket **456**. Since laser calibration assembly **454** is still inserted into aperture **466** of ball housing **464** when the user makes this adjustment, diode laser **478** will be aligned with IR sensor **460**. As a result, visible calibration beam **480** will be produced that is aligned with invisible IR field **468**. The user may then adjust IR sensor assembly **450** by pivoting ball housing **464** until visible calibration beam **480** is in the desired position. Once in the desired position, the user finally removes laser calibration assembly **454** and allows IR field **468** to be received by IR sensor **460** through aperture **466** from the desired target.

With reference now to FIG. **6**, an autonomous ventilation control method **500** is provided. Autonomous ventilation control method **500** may be implemented, for example, by controller **220** described in reference to autonomous ventilation systems **200** and **300** in FIGS. **2** and **3** above. Autonomous ventilation control method **500** will now be described in reference to controller **220** as utilized in kitchen **102**. It must be

noted, however, that autonomous ventilation control method **500** may be utilized by any controller to control a ventilation system regardless of location.

Autonomous ventilation control method **500** begins in step **504** where the energy level of cooking equipment **114** is determined or where the activation of the equipment is otherwise determined. The energy level of cooking equipment **114** may be determined by any suitable technique, including utilizing IR sensor **214** to determine the IR index of the cooking surface or cooking medium of cooking equipment **114** or determining the state/settings of equipment controls through a connection with controller **220**. In step **506**, a decision is made based on the energy level determined in step **504**. For example, if the IR index of the cooking surface or cooking medium of cooking equipment **114** is not greater than the average IR index when not in use (i.e., the energy level is low or zero), it is determined that no ventilation is required. As a result, exhaust fan **210** is turned off if it is not already off and autonomous ventilation control method **500** proceeds back to step **504**. If, however, the IR index of the cooking surface or cooking medium of cooking equipment **114** determined in step **504** is greater than the average IR index when not in use (or if the energy level is otherwise determined to be above a particular threshold), autonomous ventilation control method **500** proceeds to step **508** where the speed of exhaust fan **210** is a set to an idle rate. The idle rate may be, for example, a predetermined rate or a rate based on the measured IR index.

Once it is determined in steps **504** and **506** that cooking equipment **114** has been activated, autonomous ventilation control method **500** next proceeds to monitor cooking zone **216**. In step **512**, the IR index of cooking zone **216** is monitored with IR sensor **214**. In step **514**, the IR index (or changes in IR index) of cooking zone **216** is analyzed to determine if uncooked (i.e., cold) food has been introduced. If it is determined in step **514** that a drop in IR index has occurred due to uncooked food being introduced into cooking zone **216**, the speed of exhaust fan **210** is adjusted to a predetermined normal cooking rate in step **516**. In particular embodiments, the speed may be adjusted based on the amount of the drop in IR index determined in step **514**.

After adjusting the speed of exhaust fan **210** to a predetermined normal cooking level, autonomous ventilation control method **500** may next proceed to start a timer in step **518**. The length of the timer in step **518** determines how long exhaust fan **210** remains at the cooking rate. The length of the timer may be based on the amount of IR index drop caused by the introduction of food into cooking zone **216**. The larger the drop in IR index measured in step **512**, the more uncooked or cold food has been introduced into cooking zone **216**. The length of the timer set in step **518** may also be a fixed amount of time corresponding to the type of cooking equipment and/or food being cooked or it may be an amount of time programmed by a user. Note that in some embodiments, a timer my not be used at all to determine how long exhaust fan **210** remains at the cooking rate. In such an embodiment, IR sensor **214** may be used to determine when cooking is complete and set exhaust fan **210** back to the idle rate.

After setting the timer in step **518**, autonomous ventilation control method **500** may next proceed to monitor cooking zone **216** for flare-ups. A flare-up condition occurs when excessive amounts of air contaminants **122** such as steam, smoke, or heat are produced by cooking with cooking equipment **114**. To determine if a flare-up exists, the IR index of cooking zone **216** is measured with IR sensor **214** in step **520**. In step **522**, the IR index is analyzed to determine if a change in IR index has occurred due to the presence of excessive amounts of air contaminants **122**. The change in IR index may include a decrease associated with excessive amounts of smoke, steam, or vapor or it may be an increase associated with excessive amounts of heat from flames. If a flare-up condition exists, the speed of exhaust fan **210** is increased from the normal cooking rate to a predetermined flare-up rate. If no flare-up condition exists, the speed of the exhaust fan **210** is maintained at the normal cooking rate.

Next, autonomous ventilation control method **500** proceeds to determine in step **526** if the timer set in step **518** has expired. If the timer has expired, the speed of exhaust fan **210** is decreased to the idle rate in step **528** and autonomous ventilation control method **500** proceeds back to step **504** to monitor the energy level of cooking equipment **114**. If the timer has not expired, autonomous ventilation control method **500** proceeds back to step **520** to monitor for flare-up conditions. Alternatively, if a timer is not used in a particular embodiment, IR sensor **214** may be used in step **526** to determine when cooking is complete and proceed to the next step.

While a particular autonomous ventilation control method has been described, it should be noted that certain steps may be rearranged, modified, or eliminated where appropriate. Additionally, while certain embodiments have been described in detail, numerous changes, substitutions, variations, alterations and modifications may be ascertained by those skilled in the art, and it is intended that the present disclosure encompass all such changes, substitutions, variations, alterations and modifications as falling within the spirit and scope of the appended claims.

What is claimed is:

**1**. An autonomous ventilation system comprising:

a variable-speed exhaust fan operable to remove an air contaminant from an area;

a controller coupled to the variable-speed exhaust fan and operable to adjust the speed of the exhaust fan;

an exhaust hood coupled to the exhaust fan, the exhaust hood operable to direct the air contaminant to the exhaust fan; and

an infrared radiation ("IR") sensor coupled to the controller, the IR sensor configured to detect a change in IR index in a zone below the exhaust hood and to communicate information relating to detected changes in IR index to the controller,

wherein the controller is further operable to adjust the speed of the fan in response to information relating to changes in IR index detected by the IR sensor,

said IR sensor is part of a sensor assembly, which also includes:

an alignment laser operable to visibly indicate a point at which the sensor assembly is aimed;

a field-of-view indicator operable to visibly illuminate an area where the IR sensor is operable to detect the change in IR index;

a rotating turret supporting the IR sensor, the alignment laser, and the FOV indicator; and

an aperture assembly having one or more adjustable shunts operable to adjust the size of the area where the IR sensor is operable to detect the change in IR index by changing a size and/or shape of an aperture of the sensor assembly, the rotating turret and the aperture are constructed such that only one of the IR sensor, the alignment laser, and the FOV indicator is aligned with said aperture at a time,

the IR sensor has a field of view defined by the aperture when the IR sensor is aligned with the aperture, and

the FOV indicator provides a visual indication of the IR sensor field of view in said area when the FOV indicator is aligned with the aperture.

**2**. The system of claim **1**, wherein the IR sensor is a thermopile sensor.

**3**. The system of claim **1**, further comprising a variable-speed supply fan that is configured to deliver supply air to said area, wherein the controller is further configured to adjust the speed of the supply fan based on a speed of the exhaust fan.

**4**. A method of ventilating an area comprising:

providing a controller coupled to a variable-speed exhaust fan, the variable-speed exhaust fan having an associated exhaust hood and is operable to remove an air contaminant from an area;

providing an infrared radiation ("IR") sensor coupled to the controller;

sensing an IR index change in a zone below the exhaust hood using the IR sensor; and

adjusting the speed of the variable-speed exhaust fan using the controller based on the IR index change sensed by the IR sensor in the zone below the exhaust fan,

said IR sensor operating in a sensor assembly, the method further including, using the sensor assembly;

aligning an alignment laser to visibly indicate a point at which the sensor assembly is aimed;

using a field-of-view indicator, visibly illuminating an area where the IR sensor is operable to detect the change in IR index;

supporting the IR sensor, the alignment laser, and the FOV indicator using a rotating turret; and

using one or more adiustable shunts of an aperture assembly, adjusting the size of the area where the IR sensor is operable to detect the change in IR index by changing a size and/or shape of an aperture of the sensor assembly,

the sensing an IR index change being such that the IR sensor has a field of view defined by the aperture, and

using the FOV indicator, visually indicating the IR sensor field of view in said area while aligning the FOV indicator with the aperture,

the sensing an IR index change, the aligning an alignment laser and, the visually indicating employing the rotating turret and the aperture such that only one of the IR sensor, the alignment laser, and the FOV indicator is aligned with said aperture at a time.

**5**. The method of claim **4**, wherein the exhaust hood is located above one or more pieces of cooking equipment, and the exhaust fan is configured to exhaust contaminants arising from operation of said cooking equipment.

**6**. The method of claim **4**, wherein the sensed IR index change is a decrease associated with an introduction of a food product to the zone below the exhaust hood, and the speed of the exhaust fan is adjusted to a predetermined speed for a predetermined period of time associated with cooking of the food product.

**7**. The method of claim **4**, wherein the sensed IR index change is a decrease associated with an air contaminant produced by a food product being cooked in the zone below the exhaust hood, and the speed of the exhaust fan is adjusted to a predetermined speed so as to remove the air contaminant.

**8**. The method of claim **4**, further comprising:

controlling a variable-speed supply fan that is configured to deliver supply air from an air supply source to said area; and

adjusting a speed of the supply fan based on the speed of the exhaust fan.

**9**. The method of claim **8**, wherein the adjusted speed of the supply fan is greater than or equal to the speed of the exhaust fan.

**10**. A sensor assembly comprising:

an infrared radiation ("IR") sensor operable to detect a change in IR index within its field of view;

an alignment laser operable to visibly indicate a point at which the sensor assembly is aimed;

a field-of-view ("FOV") indicator operable to visibly illuminate an area where the IR sensor is operable to detect the change in IR index;

a rotating turret supporting the IR sensor, the alignment laser, and the FOV indicator;

an aperture assembly having one or more adjustable shunts operable to adjust the size of the area where the IR sensor is operable to detect the change in IR index by changing a size and/or shape of an aperture of the sensor assembly,

wherein the rotating turret and the aperture are constructed such that only one of the IR sensor, the alignment laser, and the FOV indicator is aligned with said aperture at a time,

the IR sensor field of view is defined by the aperture when the IR sensor is aligned with the aperture, and

the FOV indicator provides a visual indication of the IR sensor field of view in said area when the FOV indicator is aligned with the aperture.

* * * * *